


Part No. 808352

SWEDSTUFF LED BAR 20" SR 75W

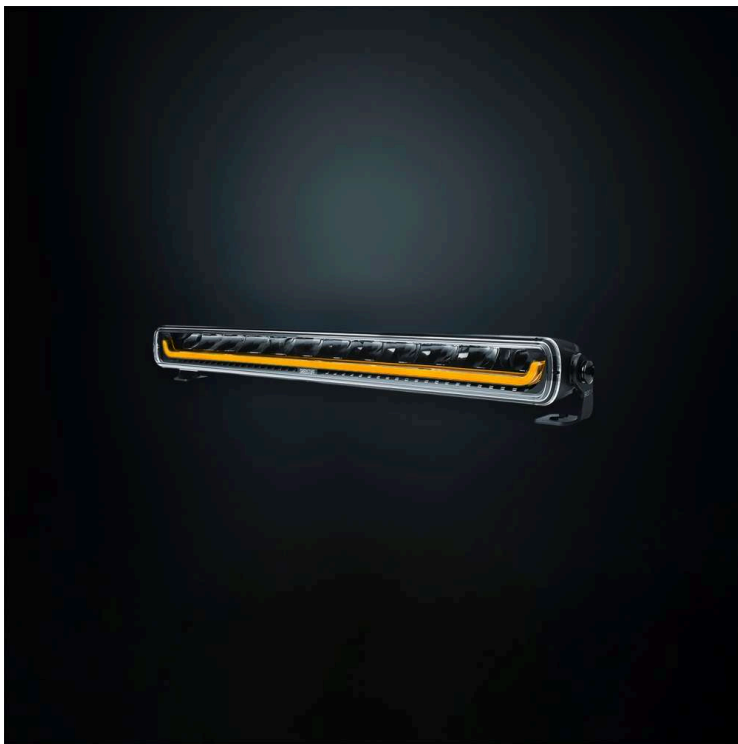

SWEDSTUFF LED BAR 20" SR 75W

WHITE / AMBER POS. | OPTIMIZED BEAM | DT-4PIN

LED Bar 20" SR – Superior LED Lighting for Any Terrain: The LED Bar 20" SR offers top-tier performance, delivering powerful lighting that enhances visibility and safety in any environment.

[Read more](#)



| | | | |
|--------------------------------------|---|---------------------------------|--------------------|
| Voltage (DC) | 10-32 V DC | Material housing/chassi | Aluminium |
| Consumption | 75 W | Material lens | Polycarbonate |
| Functions | Amber Pos., White pos., Driving beam | Length | 468.4 mm |
| Consumption specific function | White pos. 2W, Amber pos. 2W, Driving 75W | Depth | 76 mm |
| Actual lumen | 5900 lm | Height | 47 mm |
| 1 lux @ | 353 m | Height including bracket | 62 mm |
| Color temperature | 5700 K | IP-class | IP67/69K |
| Beam pattern | Optimized beam | Operating temperature | -35 · +60° °C |
| Connection | DT-4PIN | E-approved | Yes |
| Cable length | 1000 mm | ECE approval | R10.06, R148, R149 |
| Color lens | Clear | Reference number | 45 |
| Color LED's | White Amber | | |