Part No. 809403

FIREFLY LED BAR 20"




FIREFLY LED BAR 20"

WHITE / AMBER POS. | OPTIMIZED BEAM

Allow us to introduce the Firefly LED bar 20", seamlessly integrating with your vehicle while delivering exceptional performance. The result of cutting-edge engineering and our attention to detail.

Read more

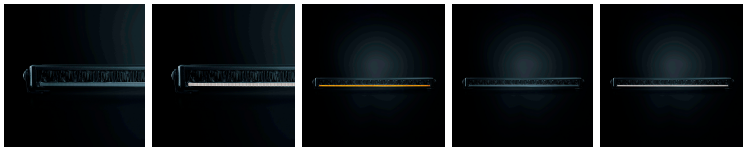

Voltage (DC)	10-48 V DC
Consumption	160 W
Functions	Amber Pos., White pos., Driving beam
Consumption specific function	White pos. 1W, Amber pos. 1W, Driving 160W
Actual lumen	10670 lm
1 lux @	496 m
Color temperature	5700 K
Beam pattern	Optimized beam
Connection	DT-4PIN

Cable length	200 mm
Color lens	Clear
Material housing/chassi	Aluminium
Material lens	Polycarbonate
IP-class	IP68
Operating temperature	-40 - +65 °C
E-approved	Yes
ECE approval	R10.06, R148, R149
Reference number	50

strands®
-lighting division