


Part No. 902000

SKYLORD LED BAR 10"



SKYLORD LED BAR 10"
WHITE / AMBER POS. | BUILT-IN RELAY | HARNESS
Delivering over 7700 actual lumens and a 500-meter reach in Xperience mode, the 10" Skylord sets a new standard for 10" LED bars. The E-mode is E-approved R148/R149, with reference number 20.
[Read more](#)

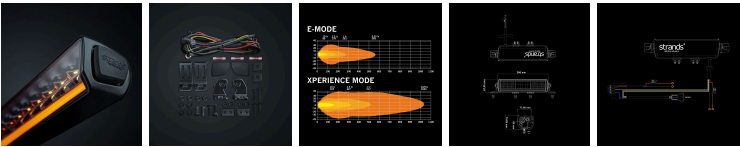

Voltage (DC)	10-32 V DC
Consumption	76 W
Functions	Amber Pos., White pos., Xperience mode, E-approved mode, Hello function
Consumption specific function	White pos. 6W, Amber pos. 6W, X-mode 76W, E-mode 37W
Actual lumen	7700 lm
1 lux @	517 m
Color temperature	5700 K
Beam pattern	Extended Beam
Connection	Cable

Cable length	2500 mm
Color lens	Clear
Material housing/chassi	Aluminium
Material lens	Polycarbonate
IP-class	IP68/69K
Operating temperature	-35 - +60 °C
E-approved	Yes
ECE approval	R10.06, R148, R149
Reference number	20