Part No. 902001

SKYLORD LED BAR 20"




SKYLORD LED BAR 20"

WHITE / AMBER POS. | BUILT-IN RELAY | HARNESS

With over 15,800 actual lumens and a 780-meter reach in Xperience mode, the 20" Skylord sets a new standard for performance. The E-mode is E-approved R148/R149 with a reference number of 2x20.

Read more

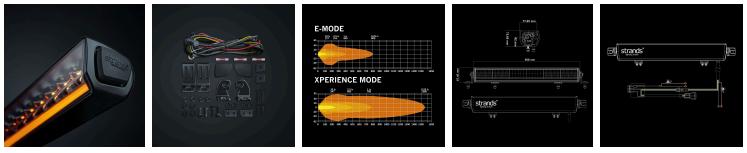

Voltage (DC)	10-32 V DC
Consumption	170 W
Functions	Amber Pos., White pos., Xperience mode, E-approved mode, Hello function
Consumption specific function	X-mode 170W, E-mode 74W, White pos. 12W, Amber pos. 12W
Actual lumen	15800 lm
1 lux @	780 m
Color temperature	5700 K
Beam pattern	Long-distance beam
Connection	Cable

Cable length	2500 mm
Color lens	Clear
Material housing/chassi	Aluminium
Material lens	Polycarbonate
IP-class	IP68/69K
Operating temperature	-35 - +60 °C
E-approved	Yes
ECE approval	R10.06, R148, R149
Reference number	20 x 2

strands®
-lighting division