


Part No. 902001

SKYLORD LED BAR 20"



SKYLORD LED BAR 20"
WHITE / AMBER POS. | BUILT-IN RELAY | HARNESS
With over 15,800 actual lumens and a 780-meter reach in Xperience mode, the 20" Skylord sets a new standard for performance. The E-mode is E-approved R148/R149 with a reference number of 2x20.
[Read more](#)

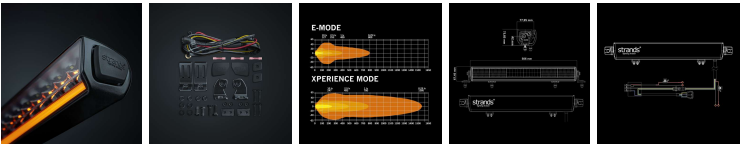

Voltage (DC)	10-32 V DC	Cable length	2500 mm
Consumption	170 W	Color lens	Clear
Functions	Amber Pos., White pos., Xperience mode, E-approved mode, Hello function	Material housing/chassi	Aluminium
Consumption specific function	X-mode 170W, E-mode 74W, White pos. 12W, Amber pos. 12W	Material lens	Polycarbonate
Actual lumen	15800 lm	IP-class	IP68/69K
1 lux @	780 m	Operating temperature	-35 · +60 °C
Color temperature	5700 K	E-approved	Yes
Beam pattern	Long-distance beam	ECE approval	R10.06, R148, R149
Connection	Cable	Reference number	20 x 2