


Part No. 906012

SKYLORD DUO WARNING / REVERSE LIGHT 42W

✓ E-APPROVED

✓ 4000 LUMENS

✓ IP69K


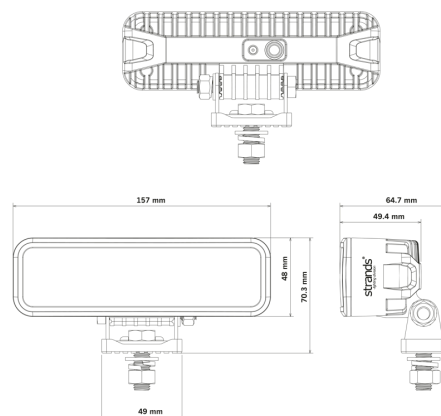


SKYLORD DUO WARNING / REVERSE LIGHT 42W

REVERSE / WARNING LIGHT | DT-4PIN

The Skylord Duo 42W warning and reverse light is developed for users who demand maximum functionality, reliable performance, and a durable installation.

[Read more](#)

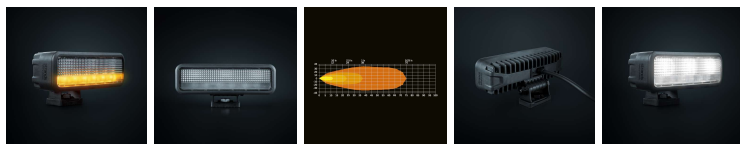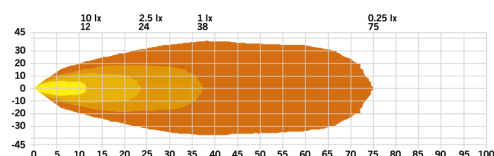

Voltage (DC)	10-32 V DC
Consumption	42 W
Functions	Warning light, Reverse light
Consumption specific function	Reverse light: 42W, Warning light: 2.8W
Actual lumen	4050 lm
1 lux @	38 m
Color temperature	5700 K
Beam pattern	Flood beam
Connection	DT-4PIN

Cable length	550 mm
Color lens	Clear
Material housing/chassi	Thermal plastic
Material lens	Polycarbonate
IP-class	IP69K
Operating temperature	-35 · +60 °C
E-approved	Yes
ECE approval	R23, R65 Class 2, R10.07