


Part No. 800423-2

VIKING COMPLETE RUBBER ARM SHORT REAR/FRONT

✓ 2W

✓ IP68

✓ 2 M CABLE

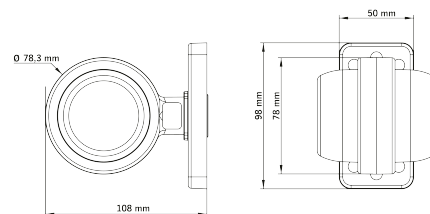

VIKING COMPLETE RUBBER ARM SHORT REAR/FRONT POSITION LIGHT

10-24V | 2M CABLE

The Viking complete short rubber arm is a compact and reliable solution, designed for 12-24V DC systems with low 2W power consumption, IP66/68 protection, and 30 mm CC for easy...

[Read more](#)



Voltage (DC)	12-24 V DC
Consumption	2 W
Functions	Front marker, Rear marker
Connection	Cable
Cable length	2000 mm
Color lens	Red Clear
Material housing/chassi	Polycarbonate

Material lens	Polycarbonate
CC	30 mm
IP-class	IP66/68
Operating temperature	-40 · +40 °C
E-approved	Yes
ECE approval	R10.05, R7