

Part No. 902001


SKYLORD LED BAR 20"



SKYLORD LED BAR 20"

WHITE / AMBER POS. | BUILT-IN RELAY | HARNESS
With over 15,800 actual lumens and a 780-meter reach in Xperience mode, the 20" Skylord sets a new standard for performance. The E-mode is E-approved R148/R149 with a reference number of 2x20.

[Read more](#)

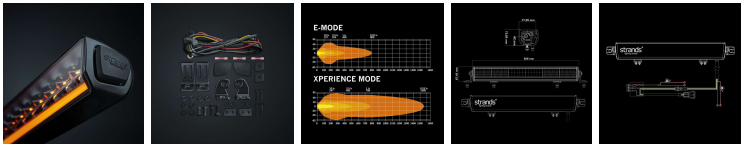

Voltage (DC) 10-32 V DC		Material housing/chassi Aluminium	
Consumption 170 W		Material lens Polycarbonate	
Functions Amber Pos., White pos., Xperience mode, E-approved mode, Hello function		Length 506 mm	
Consumption specific function X-mode 170W, E-mode 74W, White pos. 12W, Amber pos. 12W		Depth 78 mm	
Actual lumen 15800 lm		Height 67.5 mm	
1 lux @ 780 m		Height including bracket 73.9 mm	
Color temperature 5700 K		IP-class IP68/69K	
Beam pattern Long-distance beam		Operating temperature -35 - +60 °C	
Connection Cable		E-approved Yes	
Cable length 2500 mm		ECE approval R10.06, R148, R149	