

Part No. 270985A

# SIBERIA XPA DRIVING LIGHT 7"




## SIBERIA XPA DRIVING LIGHT 7"

WHITE / AMBER POS. | HELLO FUNC. | DT-4PIN

With more than 5700 incredible actual lumens and over 660-meter range in Xperience mode, the Siberia XPA 7" will light up the darkest night with its extended beam pattern.

[Read more](#)

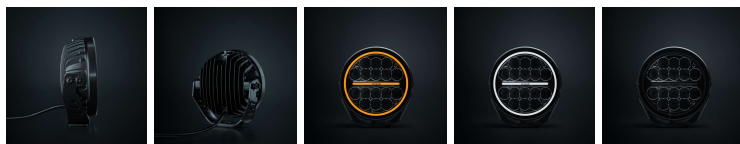

|                                      |                                                              |                                 |                    |
|--------------------------------------|--------------------------------------------------------------|---------------------------------|--------------------|
| <b>Voltage (DC)</b>                  | 10-40 V DC                                                   | <b>Material housing/chassi</b>  | Aluminium          |
| <b>Consumption</b>                   | 77 W                                                         | <b>Material lens</b>            | Polycarbonate      |
| <b>Functions</b>                     | Amber Pos., Xperience mode, E-approved mode, Warm White pos. | <b>Length</b>                   | 178 mm             |
| <b>Consumption specific function</b> | White pos. 5.5W, Amber pos. 5.5W, E-mode 22W, X-mode 77W     | <b>Depth</b>                    | 78.2 mm            |
| <b>Actual lumen</b>                  | 5710 lm                                                      | <b>Height</b>                   | 178 mm             |
| <b>1 lux @</b>                       | 662 m                                                        | <b>Height including bracket</b> | 194.1 mm           |
| <b>Color temperature</b>             | 5700 K                                                       | <b>IP-class</b>                 | IP68/69K           |
| <b>Beam pattern</b>                  | Extended Beam                                                | <b>Operating temperature</b>    | -30° · +65 °C      |
| <b>Connection</b>                    | DT-4PIN                                                      | <b>E-approved</b>               | Yes                |
| <b>Cable length</b>                  | 550 mm                                                       | <b>ECE approval</b>             | R10.06, R148, R149 |